

# TI2007-045

## Inline NATO Receptacle to Ring Terminal

### 2' Cable Assembly



Power Anytime, Anywhere

The Tesla™ Inline NATO Receptacle to Ring Terminal is constructed from a rugged combination of advanced composite materials and corrosion-resistant alloys, and features Tesla's Inline NATO receptacle. The result is a weatherproof NATO receptacle assembly that will withstand the harshest battlefield conditions and other extreme environments.

#### Features:

- Rated to 3000 peak amps
- UV, fuel, fungus, oil, and water resistant
- Tested to withstand 50 G of shock
- Exceeds MIL-STD-810F
- Manufactured by Tesla™
- 2' 1Ø Cable
- 2 Year Warranty




Tesla™ Industries, Inc.  
www.teslaind.com ♦ www.tesla1.com  
Email: tesla1@teslaind.com  
**Headquarters:** (302) 324-8910  
101 Centerpoint Blvd. New Castle, DE 19720  
**Western Regional Office:** (775) 622-8801  
9475 Double R Blvd. Suite 2, Reno, NV 89521



The POWER  
Of  
RED™



# Components and Technical Specifications

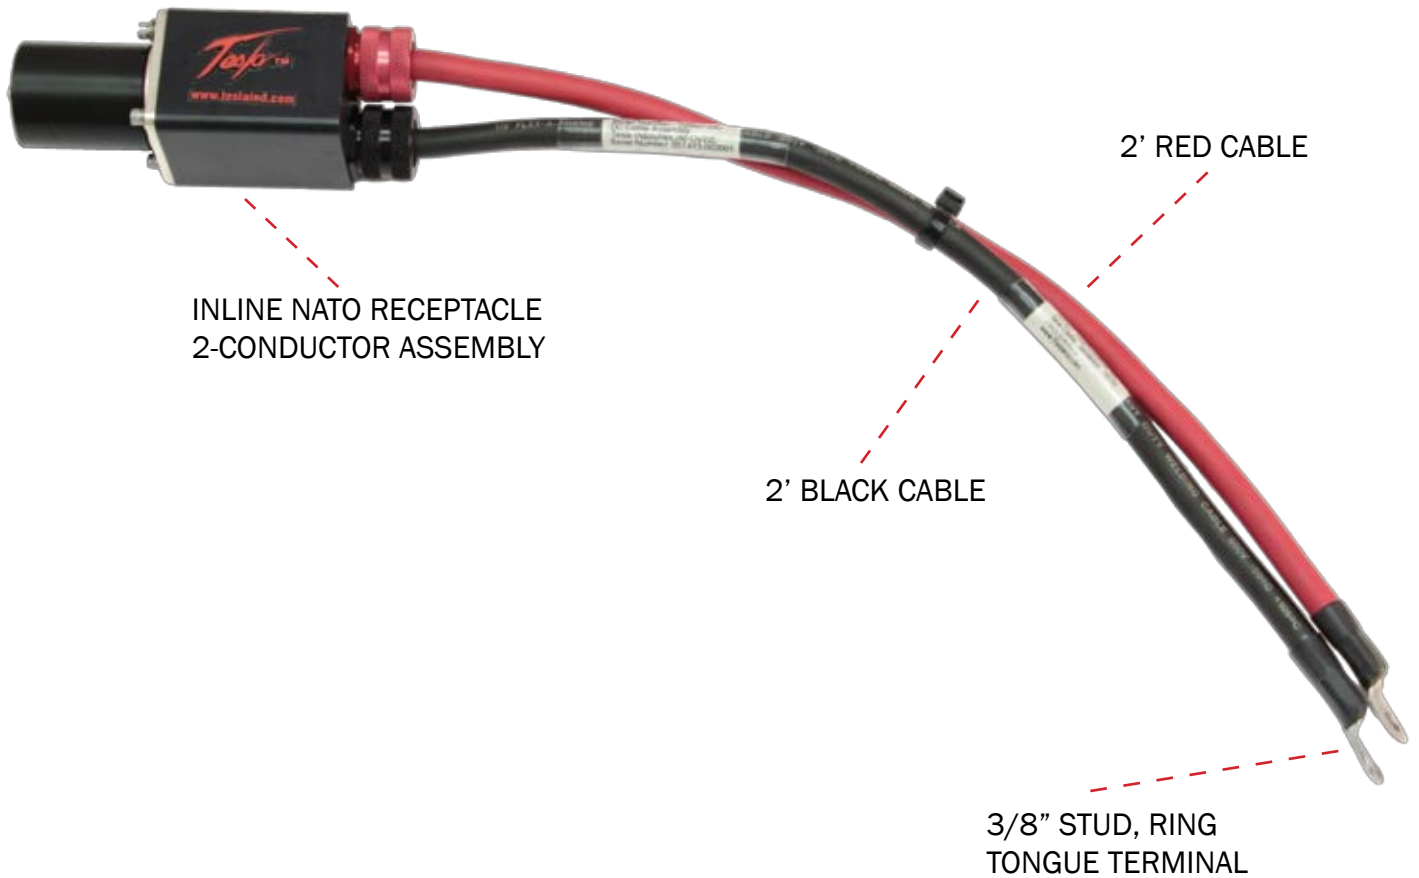

<b>Technical Specifications:</b>	
Rated Voltage	18 - 32 VDC
Inrush Current (@ 28 VDC)	3000 A
Rated Current	1500 A
Peak Current	3000 A
Storage Temperature	-65°C - 125°C (-85°F - 257°F)
Operating Temperature	-40°C - 110°C (-40°F - 230°F)
Air Gap-leakage Path	0.200" (5 mm)
Protection Class	IP28C
Cable Length	2'
Weight	3.99 lbs (1.81 kg)
Warranty	2 years (3 years optional)

