

# TI2000-294

## 2-Pin CAT<sup>®</sup> Jump Start Connector

The Tesla<sup>™</sup> 2-Pin CAT<sup>®</sup> Jump Start Connector is constructed from a rugged combination of advanced composite materials and corrosion-resistant alloys. It has been engineered to be compatible with Caterpillar<sup>®</sup> equipment. The result is a weatherproof assembly that will withstand the harshest environments.



**Power Anytime, Anywhere**

### Features:

- Rated to 3000 peak amps
- UV, fuel, fungus, water and oil resistant
- Easy component replacement
- Manufactured by Tesla<sup>™</sup>



**Standard** Cat<sup>®</sup> Connector supports Ø0.4" diameter max copper stranding and Ø1/2" to Ø5/8" insulation/jacket diameter.

**Other cable diameters supported. Please call with Inquiries.**

Tesla<sup>™</sup> Industries, Inc.

[www.teslaind.com](http://www.teslaind.com) ♦ [www.tesla1.com](http://www.tesla1.com)

Email: [tesla1@teslaind.com](mailto:tesla1@teslaind.com)

**Headquarters:** (302) 324-8910

101 Centerpoint Blvd. New Castle, DE 19720

**Western Regional Office:** (775) 622-8801



9475 Double R Blvd. Suite 2, Reno, NV 89521



The **POWER**  
Of  
**RED**<sup>™</sup>



# Components - Specifications - Parts

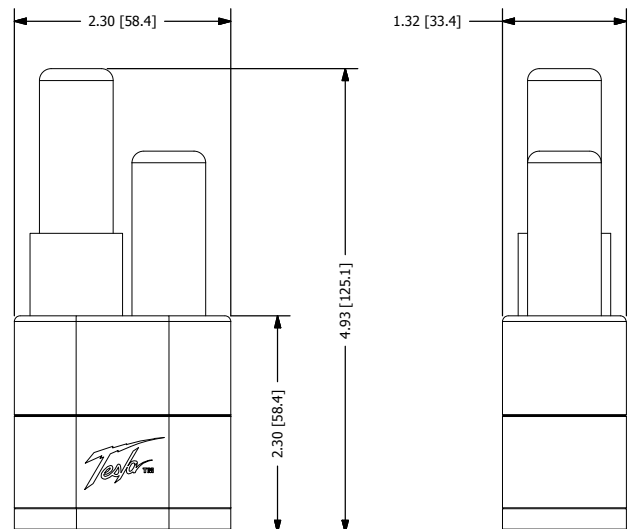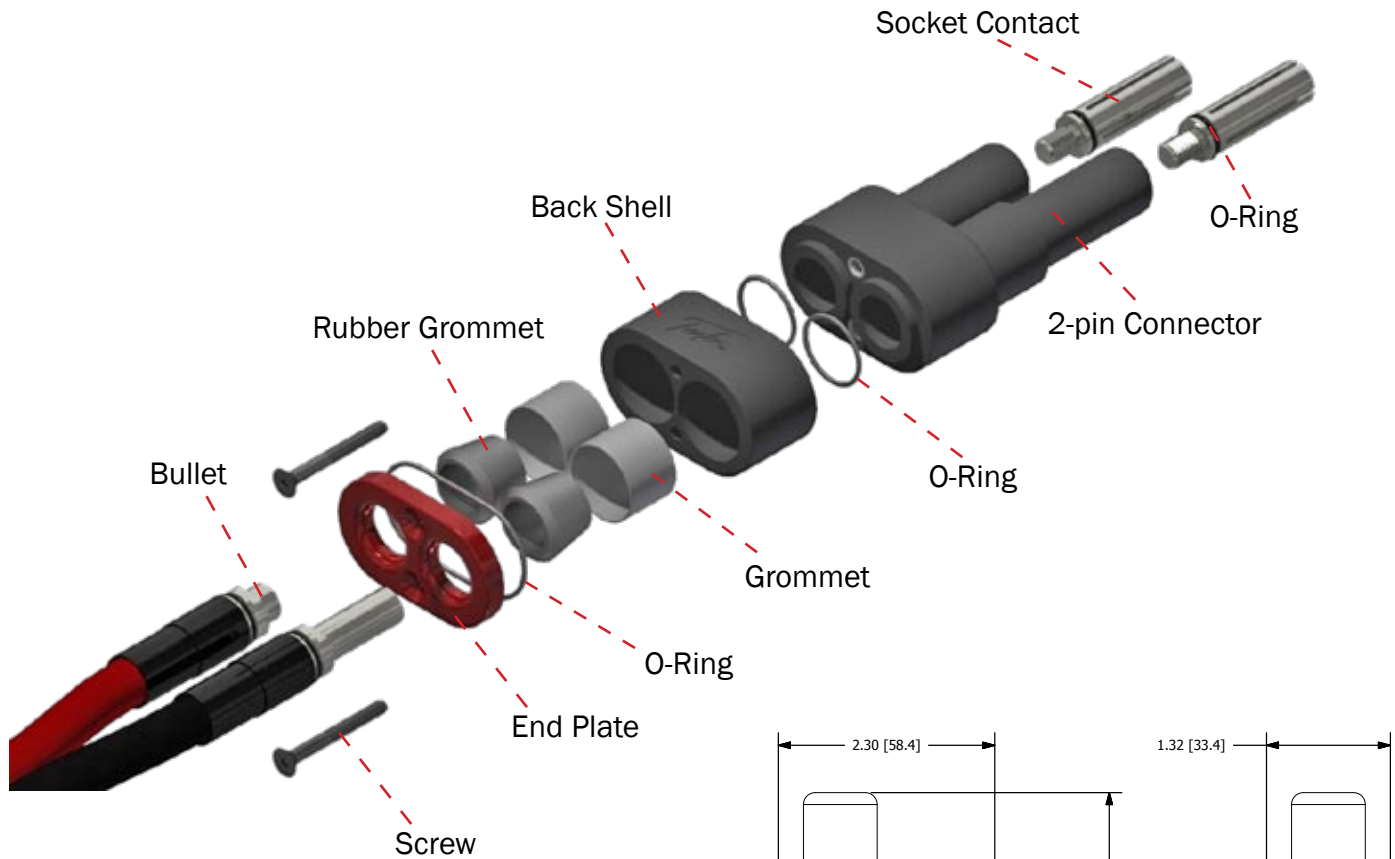

\* All dimensions are in inches [millimeters]

## Technical Specifications:

Rated Voltage	18 - 32 Vdc
Rated Current	1500 A
Peak Current	3000 A
Air Gap-Leakage Path	0.253" (6.4 mm)
Weight	0.575 lbs. (0.26 kg)
Warranty	2 years (3 years optional)

## Replacement Parts:



TI2004-105  
Contact Replacement Tool



TI2000-368  
Positive / Negative Slotted  
Contact w/ O-Ring



TI2004-093  
Positive Bullet



TI2004-092  
Negative Bullet